First Forward

140


210


329

573


625

817

957

961


990

Technical Specifications
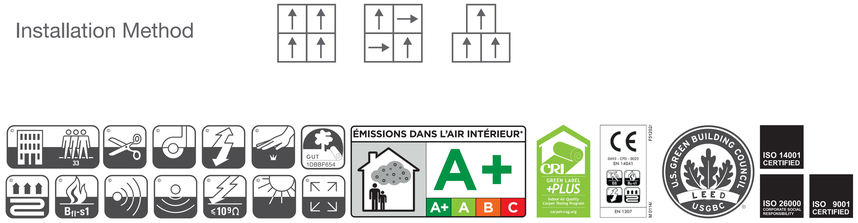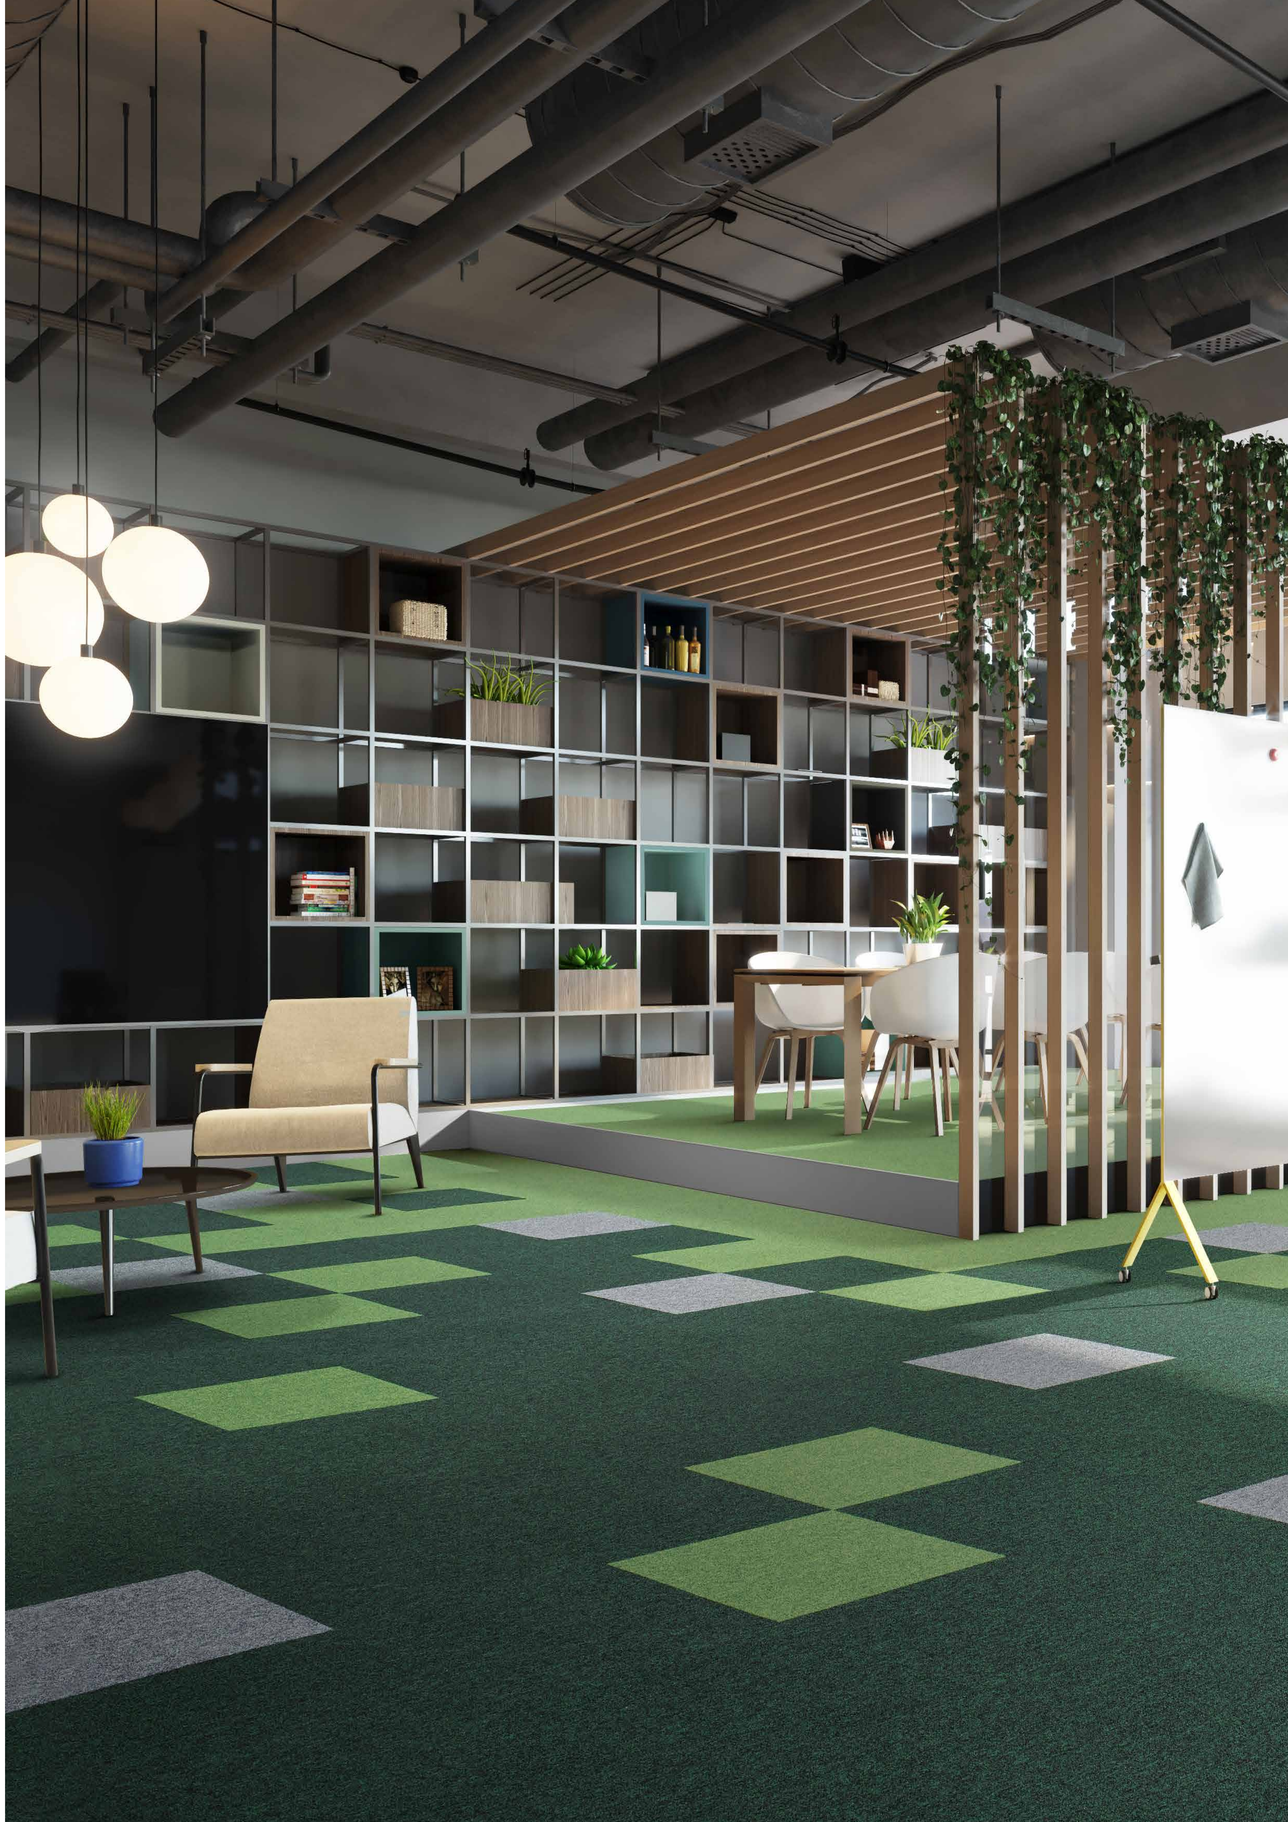
Manufacturing Process	Tufted
Gauge	1/10 " Loop
Pile Material	100% Polyamide 6
Pile Weight	540,0 g/m²
Total Weight	4.300 g/m²
Pile Height	2,9 mm
Total Height	6,2 mm
Tuft Density	180.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	$B_{fl\text{-}S1}$
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	100% Solution Dyed
Fastness to Light	Yes (≥ 7 ISO 105-B02)
Thermal Resistance	Yes (0,062 m² K/W ISO 8302)
Impact Noise Rating	Yes (ΔL_w 26 dB (1000 Hz) ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes
Installation Method