Sisal®

more than a carpet

Sisal® COMMERCIAL

Sisal® COMMERCIAL

a Carpet

شرکت نوین سیزال صنعت به‌عنوان نماینده‌ی انحصاری محصولات سیزال آلمان فعالیت خود را در ایران از سال **1384** همگام با بالاترین کیفیت خدمات آغاز کرد. موکت‌های مرغوب سیزال در کارخانجات تراز اول اروپا و آمریکا توسط متخصصین سیزال در آلمان با نگاهی ظریف، انتخاب و پس از گذراندن آزمایش هایی گوناگونی نظیر: میزان مقاومت در برابر تردد، نور آفتاب، عدم گسترش دامنه آتش، انتشار دود و گازهای سمی در زمان حریق و سازگاری با گرمایش از کف به مخاطبین ارائه می‌شود. ما در سیزال بر این باور هستیم که انتخاب یک محصول یا خدمت نیازمند حصول اطمینان از رعایت استانداردهای لازم در آن زمینه است؛ از این رو همواره تلاش کرده‌ایم با ارائه خدمات بهتر در این راه پیشرو بوده و بیش از یک دهه است که بصورت علمی و تخصصی در تحقق بخشیدن به این مهم همت گماشته ایم. روند حرکتی سیزال از آغاز در راستای شعار شرکتی خود و بر مبنای یک رویکرد مدیریتی تخصصی ، به نحوی بنا نهاده شده که کلیه فرآیندها با هم‌افزایی دانش و تجربه بر اساس یک تفکر سیستماتیک، همخوان و هماهنگ، پیگیری شده و به مقصد برسد.

هم اکنون شرکت **نوین سیزال صنعت** با به سرانجام رساندن صدها پروژه بزرگ و کوچک دارای نام و آوازه ای پر افتخار است.

Sisal COMMERCIAL

The Element Of Freedom

موکت تایل و انواع تجاری آن، علاوه بر اینکه در مقابل تردد بالا مقاوم و سازگار هستند، از نظر رنگ، طرح و ابعاد نیز دارای تنوع بالایی می باشند. با انتخاب رنگ و مدل های خلاقانه موکت نسبت به فضای مورد نظر میتوان ترکیب های بسیار مدرنی را ایجاد کرد که آشفتگی را از فضای شما گرفته و جسارت طراحی را به ذهن بیننده برساند. انتخاب عنصری هوشمندانه مانند موکت طراحی فضا را به سطح بالاتری می کشاند.

مواد اولیه با کیفیت

بهترین مقاومت در برابر سایش
ثبات ابعادی عالی
بهترین عملکرد واکنش به آتش
پشتیبان منعطف

امکان طراحی بی پایان

طراحی مدرن
ترکیب رنگ و طرح های گوناگون
امکان چیدمان های متنوع

نصب راحت و آسان

عدم نیاز به چسب هنگام نصب موکت
کمترین میزان هدر رفت موکت هنگام برش و نصب
حمل و نقل و جابجایی آسان موکت

Sisal COMMERCIAL

Sisal COMMERCIAL

Blur

95505

95585

95761

95504

95485

95106

Technical Specification

Manufacturing Process	Tufted
Gauge	1/12" Multi-Level Pattern Loop
Pile Material	100% eco solution Q® nylon
Pile Weight	610,30 g/m²
Pile Height	2,67 mm
Total Height	6,12 mm
Tuft Density	11,49 Kilotex
Permanently Antistatic	≤3,5 kv
Backing	ecoworx® tile
Dimension	45,72 x 91,44 cm
Dye Method	87% Solution Dyed / 13% Yarn Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NSF 140	Yes (Gold Certified)
CRI Green Label Plus	Yes (Certified GLP9968)
USGBC LEED	Contributes
Installation Method	 monolithic, basketweave, herringbone; brick, half basketweave, boxed in

PVC-Free

Fade

95103

95106

95330

95761

95585

95485

95504

95505

95750

Technical Specification

Manufacturing Process	Tufted
Gauge	1/12" Multi-Level Pattern Loop
Pile Material	100% eco solution Q® nylon
Pile Weight	813,74 g/m²
Pile Height	3,05 mm
Total Height	6,68 mm
Tuft Density	13,41 Kilotex
Permanently Antistatic	< 3,5 kv
Backing	ecoworx® tile
Dimension	45,72 x 91,44 cm
Dye Method	100% Solution Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NSF 140	Yes (Gold Certified)
CRI Green Label Plus	Yes (Certified GLP9968)
USGBC LEED	Contributes

Installation Method

basketweave

herringbone


boxed in

brick

half basketweave

PVC-Free

Vertical Edge

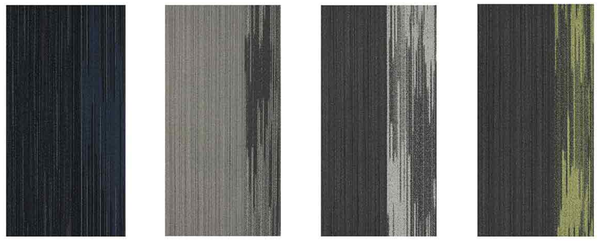

67506 67555 67585 67586

Technical Specification

Manufacturing Process	Tufted
Gauge	1/12" Multi-Level Pattern Loop
Pile Material	100% eco solution Q® nylon
Pile Weight	745,93 g/m²
Pile Height	3,00 mm
Total Height	6,40 mm
Tuft Density	12,50 Kilotex
Permanently Antistatic	< 3,5 kv
Backing	ecoworx® tile
Dimension	45,72 x 91,44 cm
Dye Method	92% Solution Dyed / 8% Yarn Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NSF 140	Yes (Gold Certified)
CRI Green Label Plus	Yes (Certified GLP9968)
USGBC LEED	Contributes
Installation Method	



PVC-Free

Ignite

48170

48481

48505

485516

48530

48531

48557

Technical Specification

Manufacturing Process	Tufted
Gauge	1/12" Multi-Level Pattern Loop
Pile Material	100% eco solution Q® nylon
Pile Weight	610,30 g/m^2
Pile Height	2,67 mm
Total Height	6,12 mm
Tuft Density	11,49 Kilotex
Permanently Antistatic	≤3,5 kv
Backing	ecoworx® tile
Dimension	45,72 x 91,44 cm
Dye Method	87% Solution Dyed / 13% Yarn Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NSF 140	Yes (Gold Certified)
CRI Green Label Plus	Yes (Certified GLP9968)
USGBC LEED	Contributes
Installation Method	 monolithic basketweave herringbone brick half basketweave boxed in

PVC-Free

Dye Lab

41480

41496

41504

41516

41756

41517

41762

41906

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Cut Pile
Pile Material	100% eco solution Q®
Pile Weight	1.220,61 g/m²
Pile Height	4,45 mm
Total Height	8,38 mm
Tuft Density	13,79 Kilotex
Permanently Antistatic	≤ 3,5 kv
Backing	ecoworx® tile
Dimension	60,96 x 60,96 cm
Dye Method	100% Piece Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NFS 140	Yes (Gold Certified)
USGBC LEED	Contributes

Installation Method



Hexagon

54668 Plane



54326 Plane



54432 Plane



54505 Plane



54555 Plane



54595 Plane



85855 Plane

55530 Linear



55595 Linear



55505 Linear

Technical Specification

	Linear	Plane
Manufacturing Process	Tufted	Tufted
Gauge	1/12 Multi - Level Pattern Loop	1/12 Random Tip Shear
Pile Material	eco solution Q® nylon	eco solution Q® nylon
Pile Weight	678,11 g/m^2	745,93 g/m^2
Pile Height	3,02 mm	2,92 mm
Total Height	6,22 mm	6,50 mm
Tuft Density	11,27 Kilotex	12,82 Kilotex
Permanently Antistatic	≤ 3,5 kv	≤ 3,5 kv
Backing	eco works® tile	eco works® tile
Dimension	63,20 cm x 73,15 cm x 36,58 cm	63,20 cm x 73,15 cm x 36,58 cm
Dye Metho	70% Solution Dyed - 30% Yarn Dyed	100% Solution Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)	Yes (V3,1 Silver)
USGBC LEED	Conteributes	Conteributes
Radiant Panel	Class I	Class I
Nbs Smoke	Less Than 450	Less Than 450
Installation Method	monolithic random diagonal	

Declare.

PVC-Free

GSA

WORLD GREEN BUILDING COUNCIL

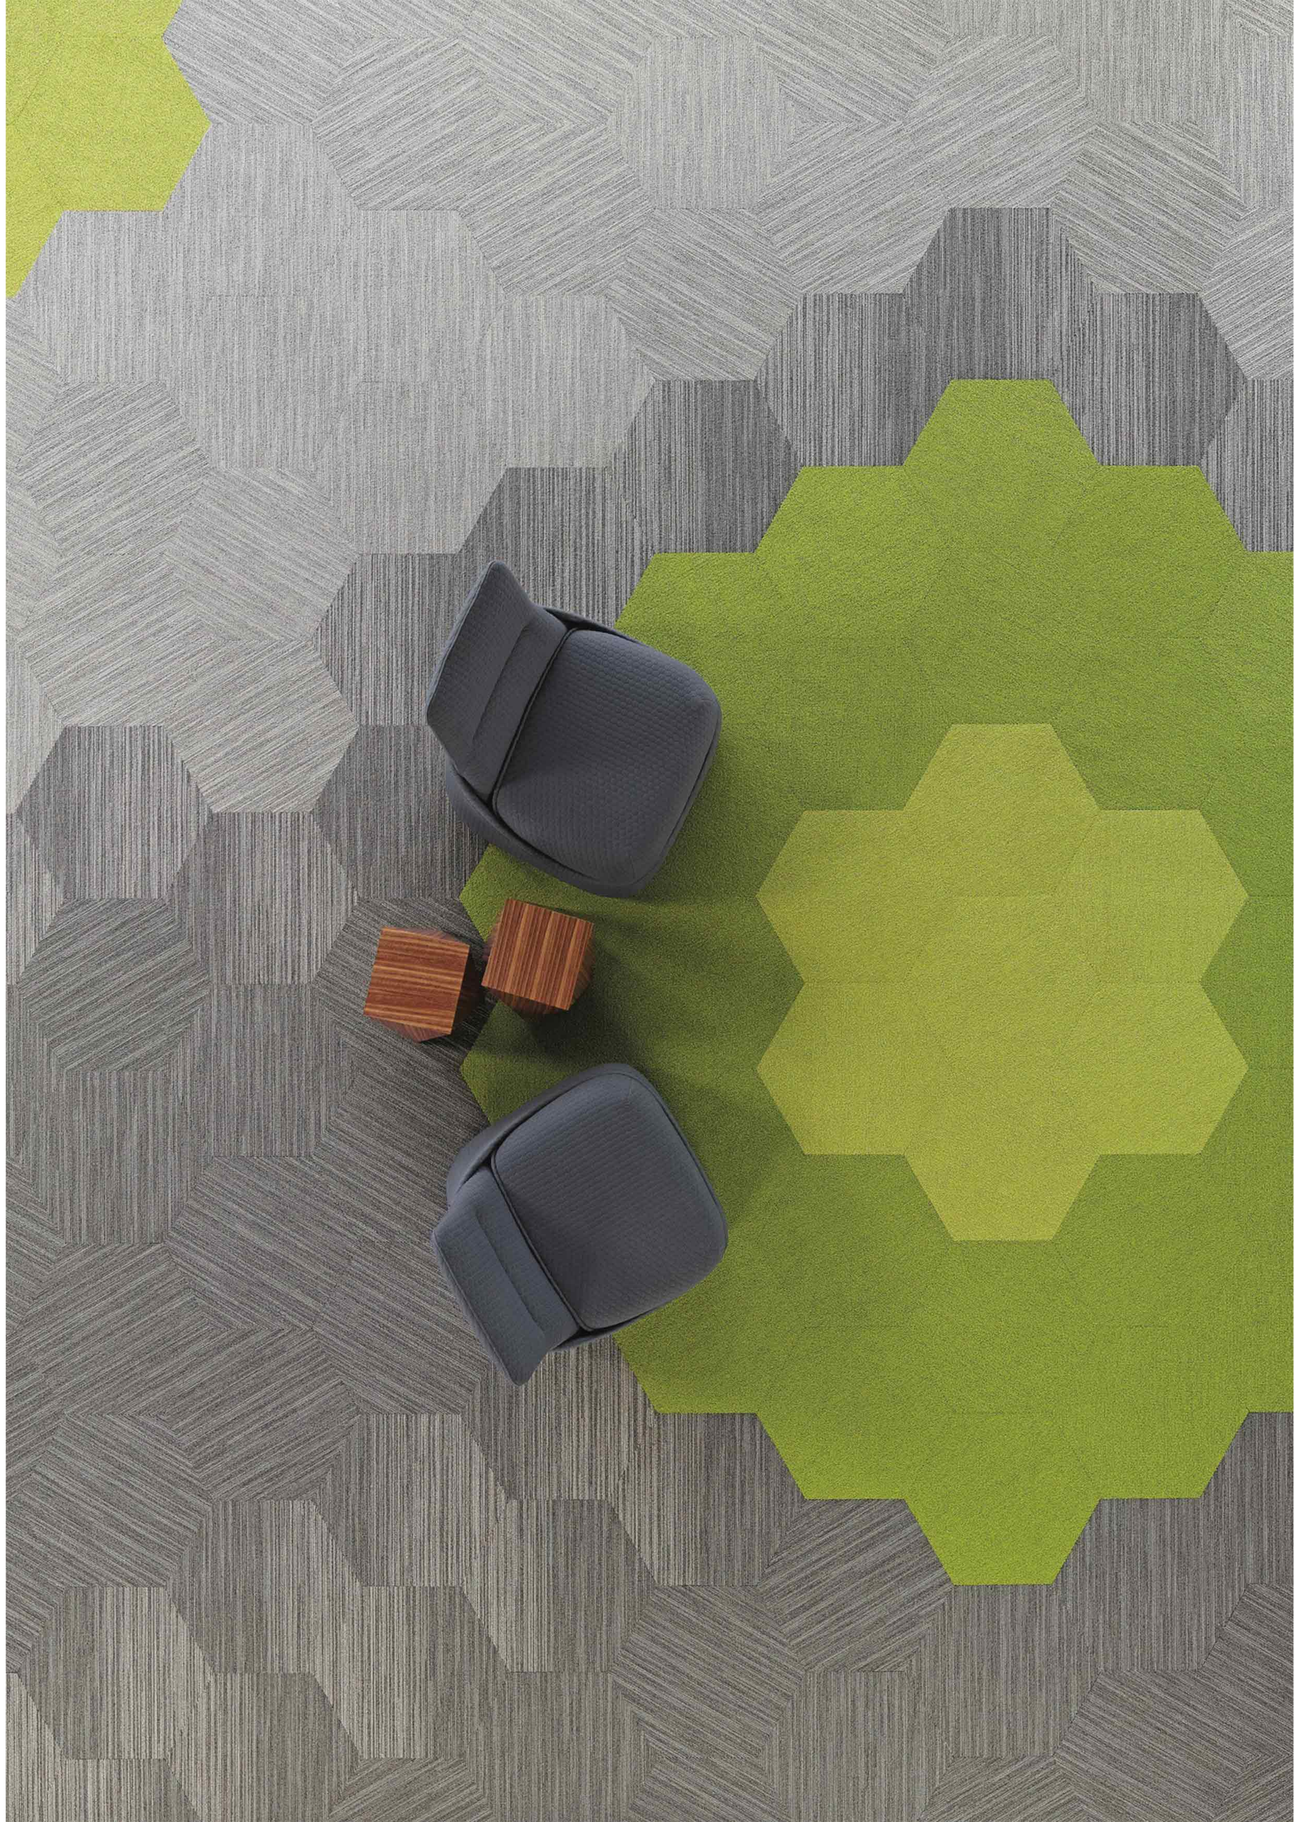

Color Pop

320

520



550

590

650

770

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Multi-Level Pattern Loop
Pile Material	Eco solution Q® nylon
Pile Weight	542,49 g/m²
Pile Height	2,51 mm
Total Height	5,69 mm
Tuft Density	10,83 Kilotex
Permanently Antistatic	< 3,5 kv
Backing	Ecoworx® tile
Dimension	60,96 x 60,96 cm
Dye Method	100 % Solution Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NSF 140	Yes (Gold Certified)
CRI Green Label Plus	Yes (Certified GLP9968)
USGBC LEED	Contributes
Installation Method	

Tempt


18500

18504


18505


18585

18761

18485

Technical Specification

Manufacturing Process	Tufted
Gauge	1/12" Multi-Level Pattern Loop
Pile Material	100% eco solution Q® nylon
Pile Weight	542,49 g/m²
Pile Height	2,97 mm
Total Height	6,07 mm
Tuft Density	9,17 Kilotex
Permanently Antistatic	< 3,5 kv
Backing	ecoworx® tile
Dimension	60,96 x 60,96 cm
Dye Method	100% Solution Dyed
Cradle to Cradle Certified	Yes (V3,1 Silver)
NSF 140	Yes (Gold Certified)
CRI Green Label Plus	Yes (Certified GLP9968)
USGBC LEED	Contributes

Installation Method



PVC-Free

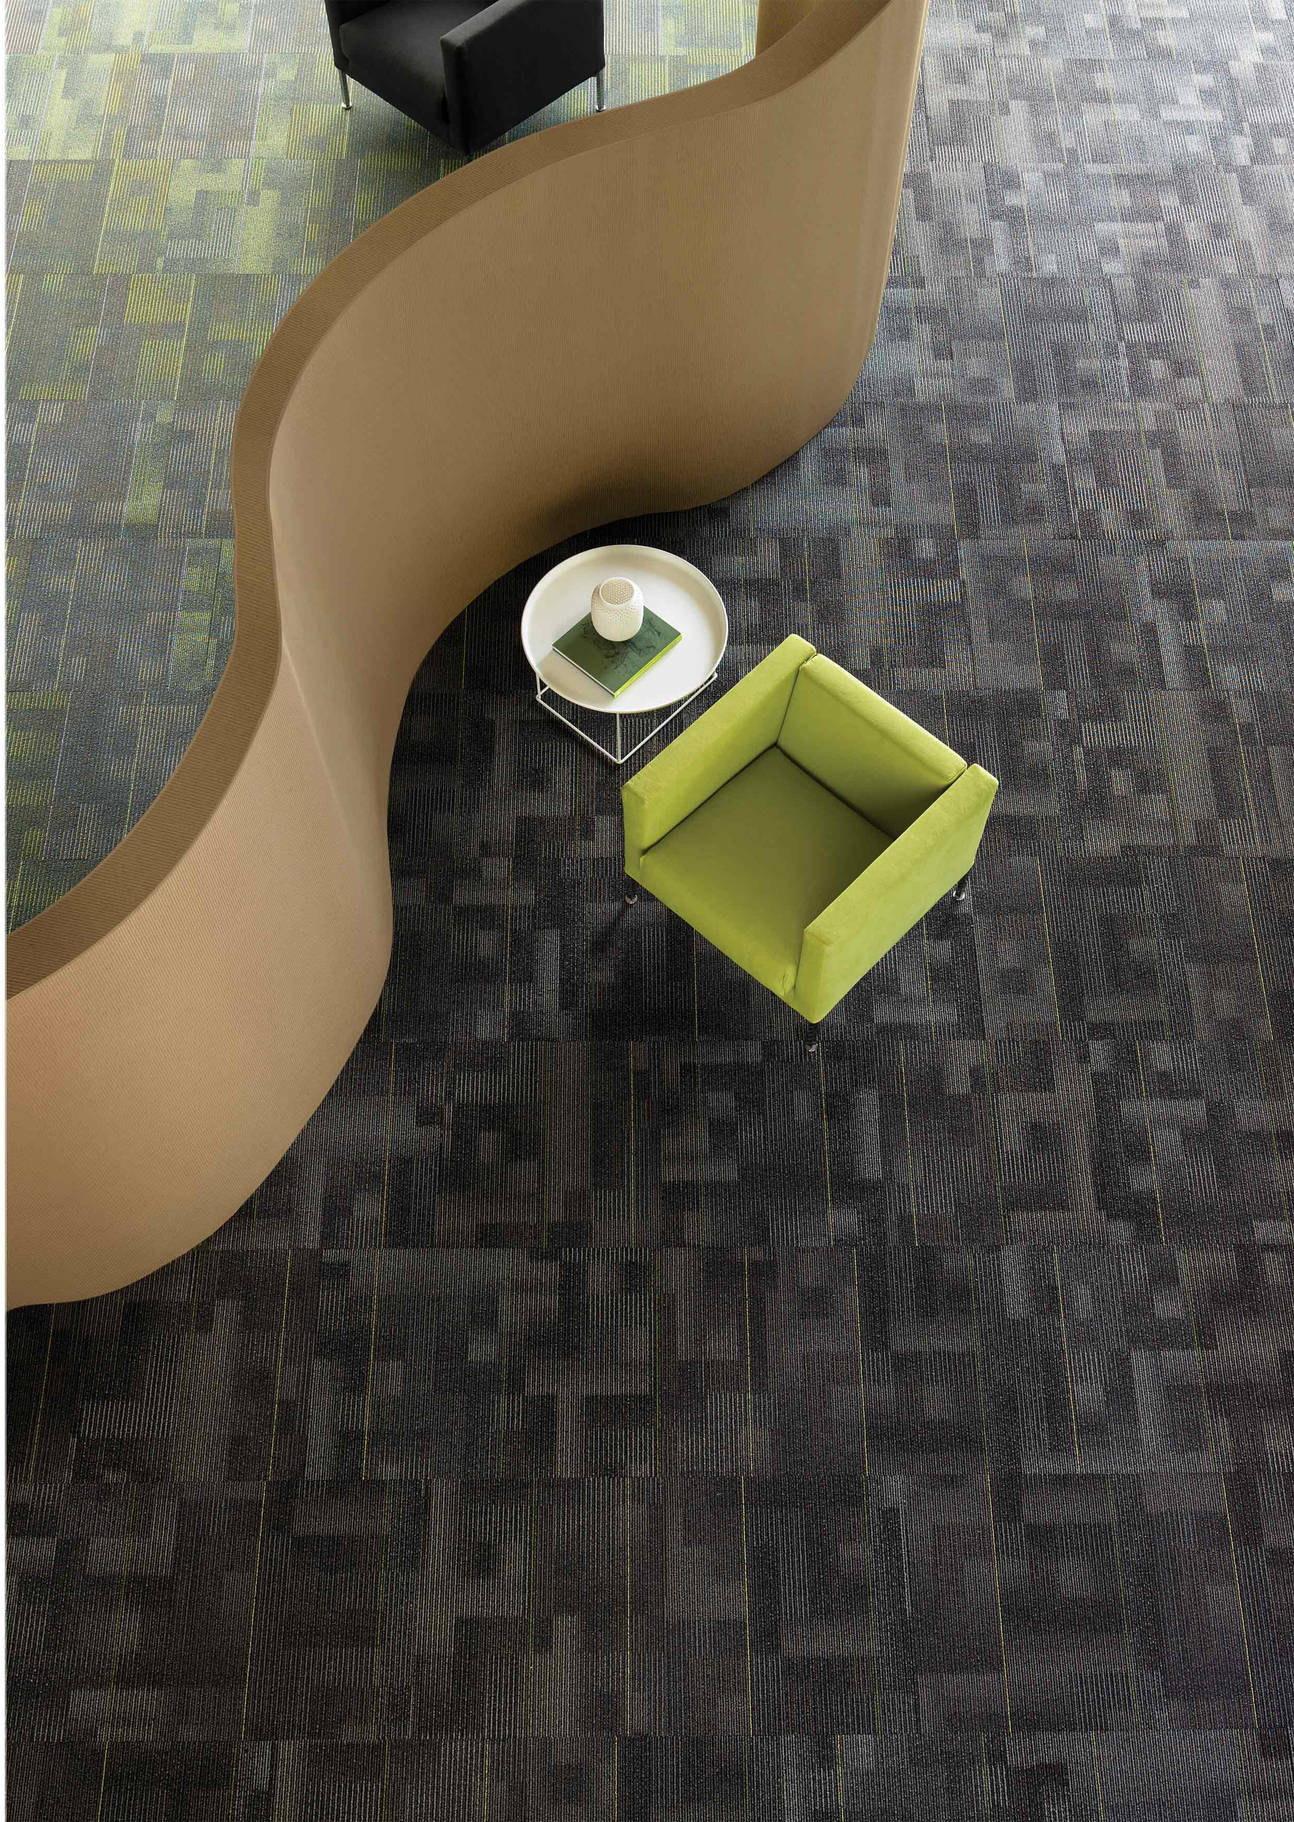

NATURE

is that teacher ...

Sisal® COMMERCIAL

1398

راه اندازی بخش طراحی
موکت اختصاصی برای
اولین بار در ایران

1398

راه اندازه بخش سیستم های
ورودی و نظافتی پامیس

1397

طرح توسعه انبار سیزال
در سال ۹۷

انتقال شرکت به ساختمان سیزال

1398

اعطـای نمایندگی و افزایش
نمایندگان و عاملین فروش
شرکت نوین سیزال صنعت
در اقصی نقاط کشور

1398

افزایـش تعـداد کارکنـان سـیزال در بخـش
هـای جدیـد و نوپـا به منظـور اسـتفاده و بهره
گیـری از اسـتعداد هـای خـلاق در حـوزه هـای
تخصصی و عمومی مرتبط

1398

گسـترش بی سابقه دامنه
محصولات اداری شـامل
موکت های تایل و رول

1394

تاسیس شعبه سوم از
فروشگاه های سیزال

1392

تاسیس شعبه دوم از
فروشگاه های سیزال

1390

تاسیس اولین شعبه از
فروشگاه های سیزال

1390

ارائـه و معرفی الیاف های طبیعی
سـیزال و رونمایی از طیف وسیعی
از موکت های مرغوب هتلی

1392

شـرکت در ده هـا نمایشـگاه مختلـف
مربوط به صنعت ساختمان

1384

تاسیس شرکت
نوین سیزال صنعت

1384

First Blocks



572



912



930



993

Technical Specification

Manufacturing Process	Tufted
Gauge	1/12" Loop Pile
Pile Material	100% Polyamide 6
Pile Weight	600,0 g/m²
Total Weight	4.400 g/m²
Pile Height	3,1 mm
Total Height	6,8 mm
Tuft Density	174.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	$B_{fl\text{-}s1}$
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	100% Solution Dyed
Fastness to Light	Yes (≥ 7 ISO105-B02)
Thermal Resistance	Yes (0,064 m² K/W - ISO 8302)
Impact Noise Rating	Yes (ΔL 36 dB (1000 Hz) - ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes
Installation Method	

First Radiant

204

316

322

410

504

609

900

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Loop Pile
Pile Material	100% Polyamide 6 Aqualon
Pile Weight	540,0 g/m²
Total Weight	4.300 g/m²
Pile Height	2,9 mm
Total Height	6,4 mm
Tuft Density	156.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	B_{fl-s1}
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	100% Solution Dyed
Fastness to Light	Yes (≥ 7 ISO105-B02)
Thermal Resistance	Yes (0,047 m² K/W - ISO 8302)
Impact Noise Rating	Yes (ΔL 37 dB (1000 Hz) - ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes
Installation Method	

First Define

140



210



322



329



995

573



625

957

965

Technical Specifications

Manufacturing Process	Tufted
Gauge	1/12" Loop
Pile Material	100% Polyamide 6
Pile Weight	590,0 g/m^2
Total Weight	4.500 g/m^2
Pile Height	2,9 mm
Total Height	6,5 mm
Tuft Density	202.000 /m^2
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	$B_{fl\text{-}S1}$
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	100% Solution Dyed
Fastness to Light	Yes (≥7 ISO 105-B02)
Thermal Resistance	Yes (0,066 m^2 K/W ISO 8302)
Impact Noise Rating	Yes (ΔL 25 dB (1000 Hz) ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes
Installation Method	

First Forward

140


210


329

573


625

817

957

961


990

Technical Specifications

Manufacturing Process	Tufted
Gauge	1/10 " Loop
Pile Material	100% Polyamide 6
Pile Weight	540,0 g/m²
Total Weight	4.300 g/m²
Pile Height	2,9 mm
Total Height	6,2 mm
Tuft Density	180.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	$B_{fl\text{-}S1}$
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	100% Solution Dyed
Fastness to Light	Yes (≥ 7 ISO 105-B02)
Thermal Resistance	Yes (0,062 m² K/W ISO 8302)
Impact Noise Rating	Yes (ΔL_w 26 dB (1000 Hz) ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes
Installation Method	

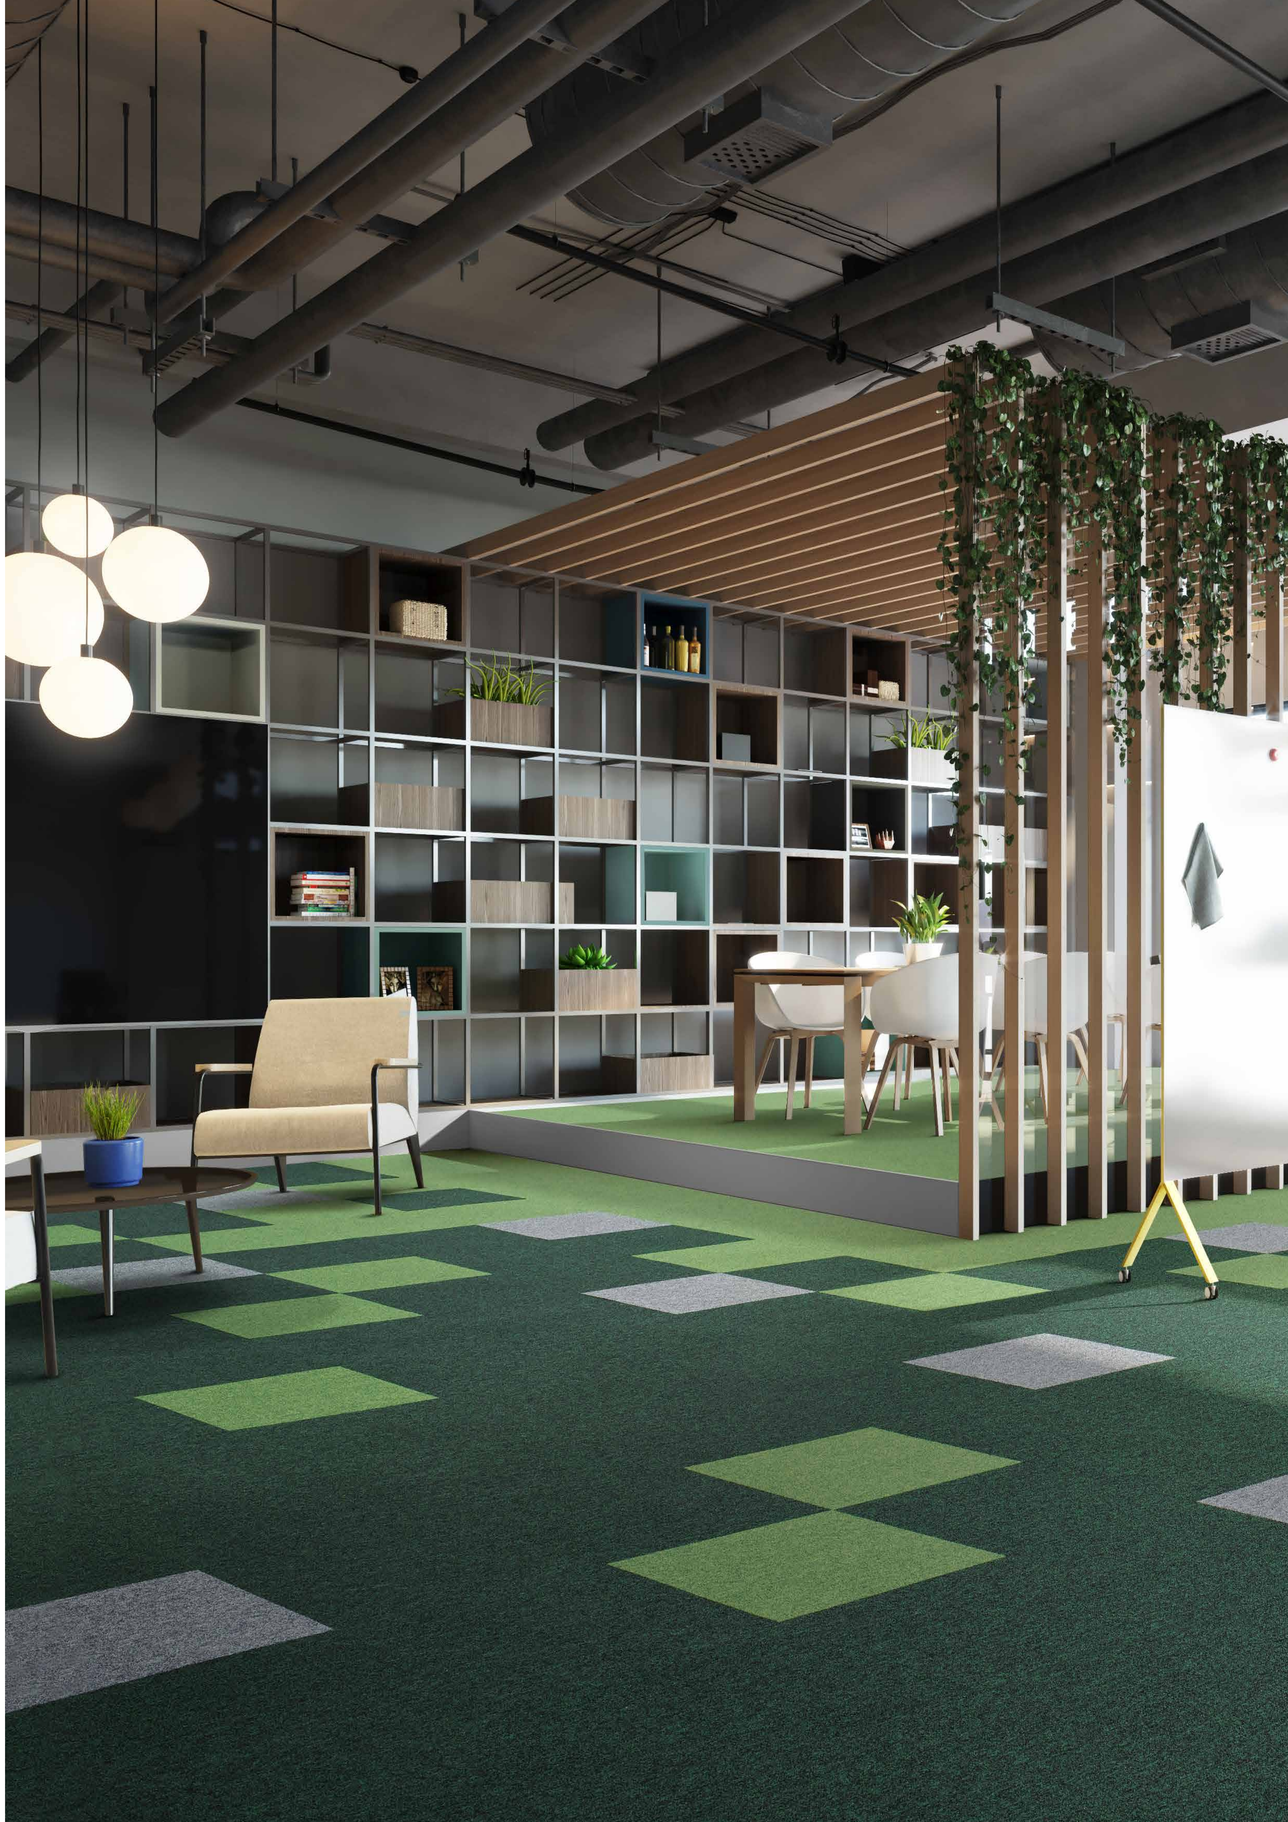

First Straightline

990

992

993

995


996


997

Technical Specifications

Manufacturing Process	Tufted
Gauge	1/10 " Loop
Pile Material	100% Polyamide 6
Pile Weight	540,0 g/m²
Total Weight	4.300 g/m²
Pile Height	2,9 mm
Total Height	6,2 mm
Tuft Density	180.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	$B_{fl\text{-}S1}$
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	100% Solution Dyed
Fastness to Light	Yes (≥ 7 ISO 105-B02)
Thermal Resistance	Yes (0,062 m² K/W ISO 8302)
Impact Noise Rating	Yes (ΔL_w 26 dB (1000 Hz) ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes
Installation Method	

Step/ First

21F

25F

60F

30F

41F

50F



961 _ First



990 _ First

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Loop Pile
Pile Material	100% Polyamide 6 Aqualon
Pile Weight	530,0 g/m²
Total Weight	4.300 g/m²
Pile Height	2,8 mm
Total Height	6,0 mm
Tuft Density	160.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	$B_{fl\text{-}s1}$
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	100% Piece Dyed
Fastness to Light	Yes (≥ 5-6 ISO 105-B02)
Thermal Resistance	Yes (0,053 m² K/W ISO 8302)
Impact Noise Rating	Yes (ΔL 33 dB (1000 Hz) ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes

Installation Method

Patchwork

351

592

610

830

957

965

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Loop Pile
Pile Material	100% Polyamide 6
Pile Weight	605,0 g/m²
Total Weight	4.400 g/m²
Pile Height	3,1 mm
Total Height	6,6 mm
Tuft Density	218.000 /m²
Permanently Antistatic	≤ 2,0 kv ISO 6356
Fire Behavior	$B_{fl\text{-}s1}$
Backing	Tense Back
Dimension	50 x 50 cm
Dye Method	Printed
Fastness to Light	Yes (≥ 5-6 ISO105-B02)
Thermal Resistance	Yes (0,063 m² K/W - ISO 8302)
Impact Noise Rating	Yes (ΔL 32 dB (1000 Hz) - ISO 10140)
USGBC LEED	Contributes
CRI Green Label Plus	Yes

Installation Method

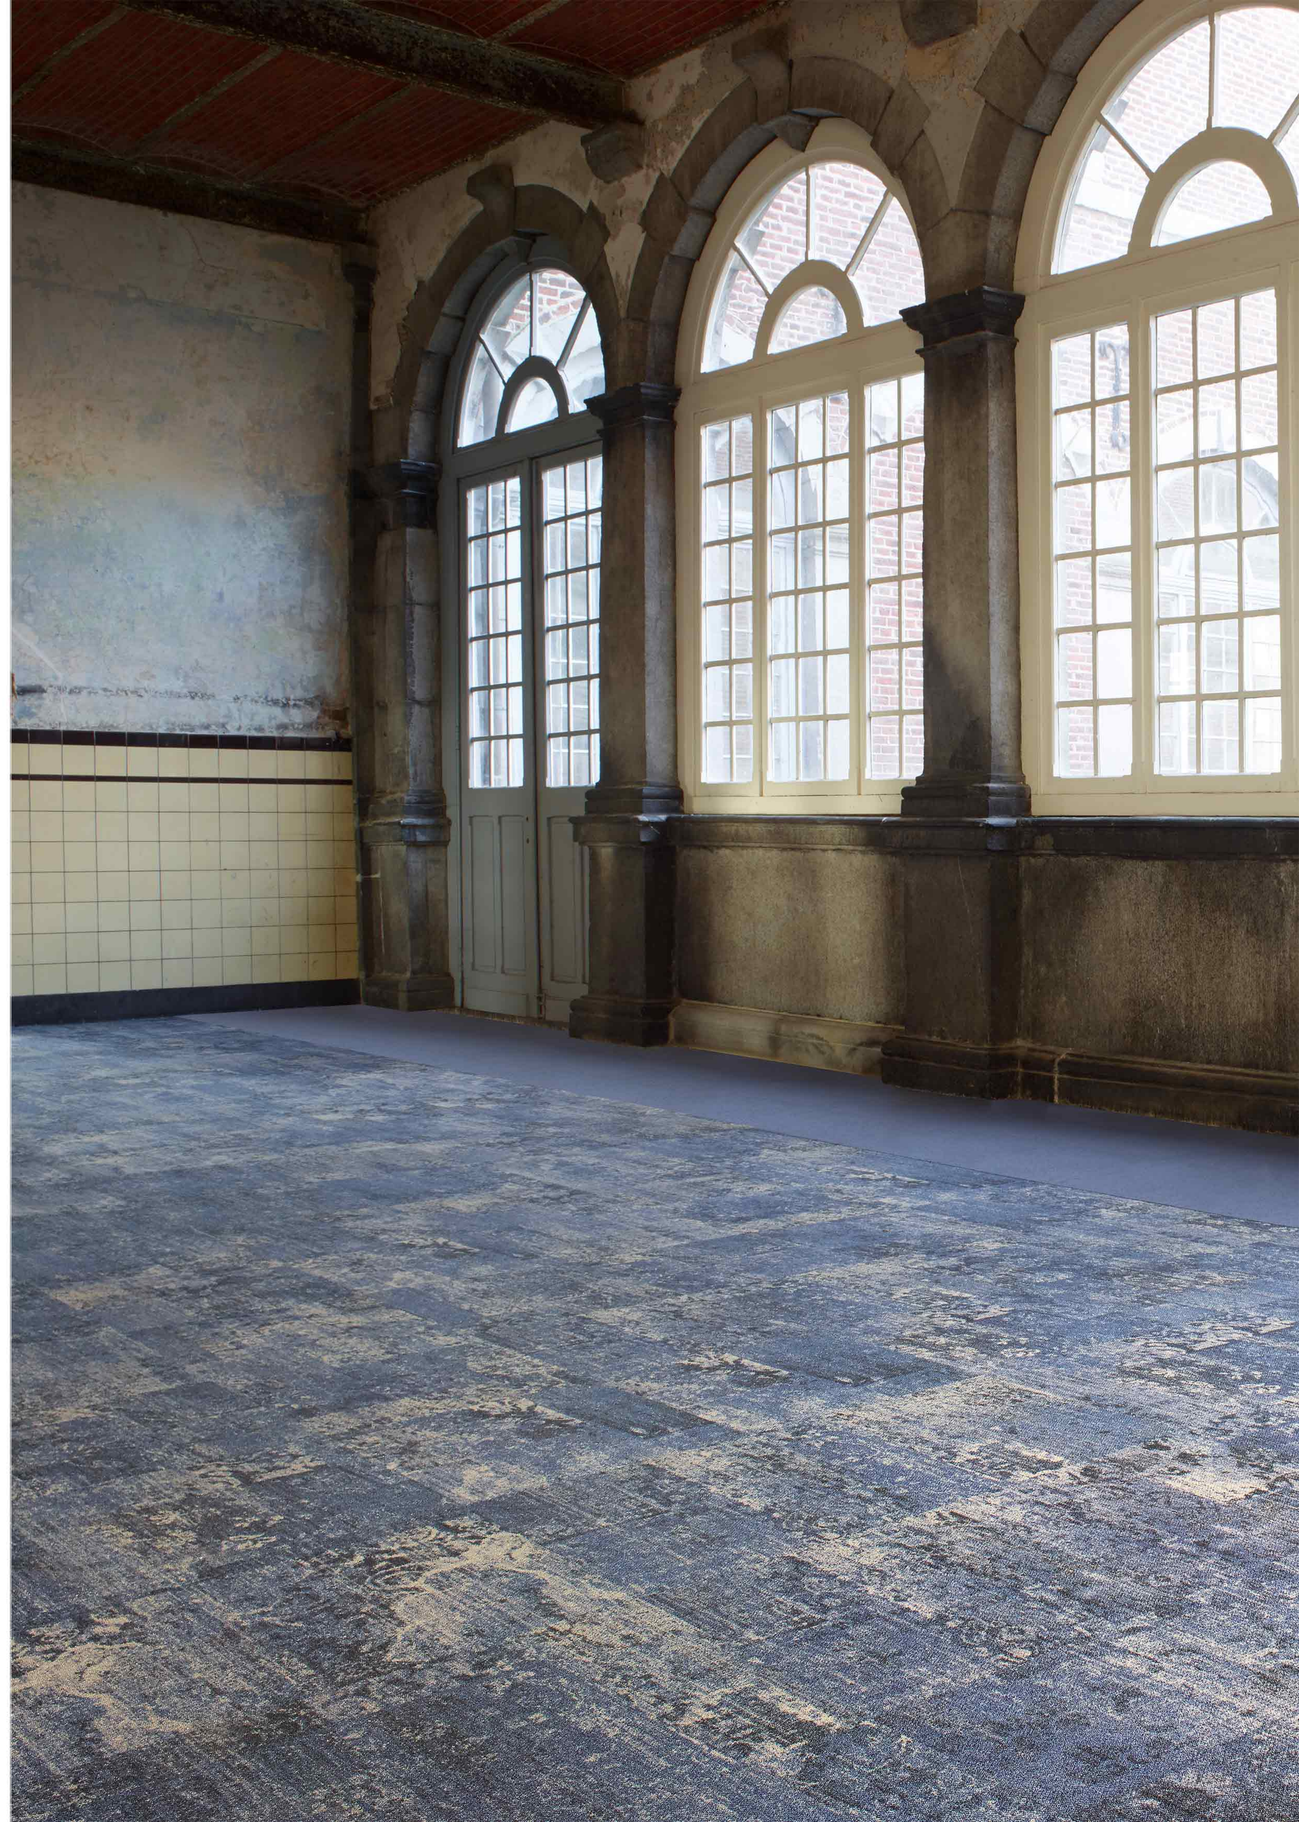

Granizo

20

41

70

75

76

77

78

82

83

Technical Specification

	Broadloom	Tile
Manufacturing Process	Tufted	Tufted
Gauge	10/1" Loop Pile	10/1" Loop Pile
Pile Material	%100 Polyamide	%100 Polyamide
Pile Weight	550 g/m²	550 g/m²
Total Weight	1.650 g/m²	3.540 g/m²
Pile Height	3,5 mm	3,5 mm
Total Height	5,5 mm	6,0 mm
Number of Tufts	181.240 /m²	181.240 /m²
Dye Method	%100 Solution Dyed	%100 Solution Dyed
Fire Behavior	$C_{fl\text{-}S1}$	$B_{fl\text{-}S1}$
Light Fastness	5	5
Wearability	4	4
Water Fastness	4	4
Use Area	Extreme / Extreme (33)	Extreme / Extreme (33)
Sound Insulation	ca. 23 dB	ca. 25 dB
Backing	Action Back	Tense Back
Width	400 cm	-
Dimension	-	50 x 50 cm

Installation Method

Silver Line

90

73


74

76

77

78

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10” Loop Pile
Pile Material	100% Polyamide 6
Pile Weight	785,0 g/m^2
Total Weight	4.540 g/m^2
Pile Height	3,0 mm
Total Height	5,0 mm
Pile Density	0.137 g/cm^3
Dye Method	100% Solution Dyed
Fire Behavior	$B_{fl\text{-}S1}$
Light Fastness	≥ 5
Wearability	≥ 4
Water Fastness	≥ 4
Use Area	Extreme (33)
Backing	Tense Back
Dimension	50 x 50 cm

Installation Method

Hogo

70

76

77

78

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10” Loop Pile
Pile Material	100% Polyamide 6
Pile Weight	630,0 g/m^2
Total Weight	4.380 g/m^2
Pile Height	3,0 mm
Total Height	6,0 mm
Pile Density	0.111 g/cm^3
Dye Method	100% Solution Dyed
Fire Behavior	$B_{fl\text{-}S1}$
Light Fastness	≥ 5
Wearability	≥ 4
Water Fastness	≥ 4
Use Area	Extreme (33)
Backing	Tense Back
Dimension	50 x 50 cm

Installation Method



Color Code:11

RASPBERRY

Color Code:17

BURGUNDY

Color Code:53

TUSCANY

Color Code:24

SACRAMENTO

Color Code:123

OLIVE

Color Code:174

PRUSSIAN

Fortesse

173


174

177

178

276


93

90

96

94

53

123

23

24

11

12

64

17

136

138

40

144


197

299

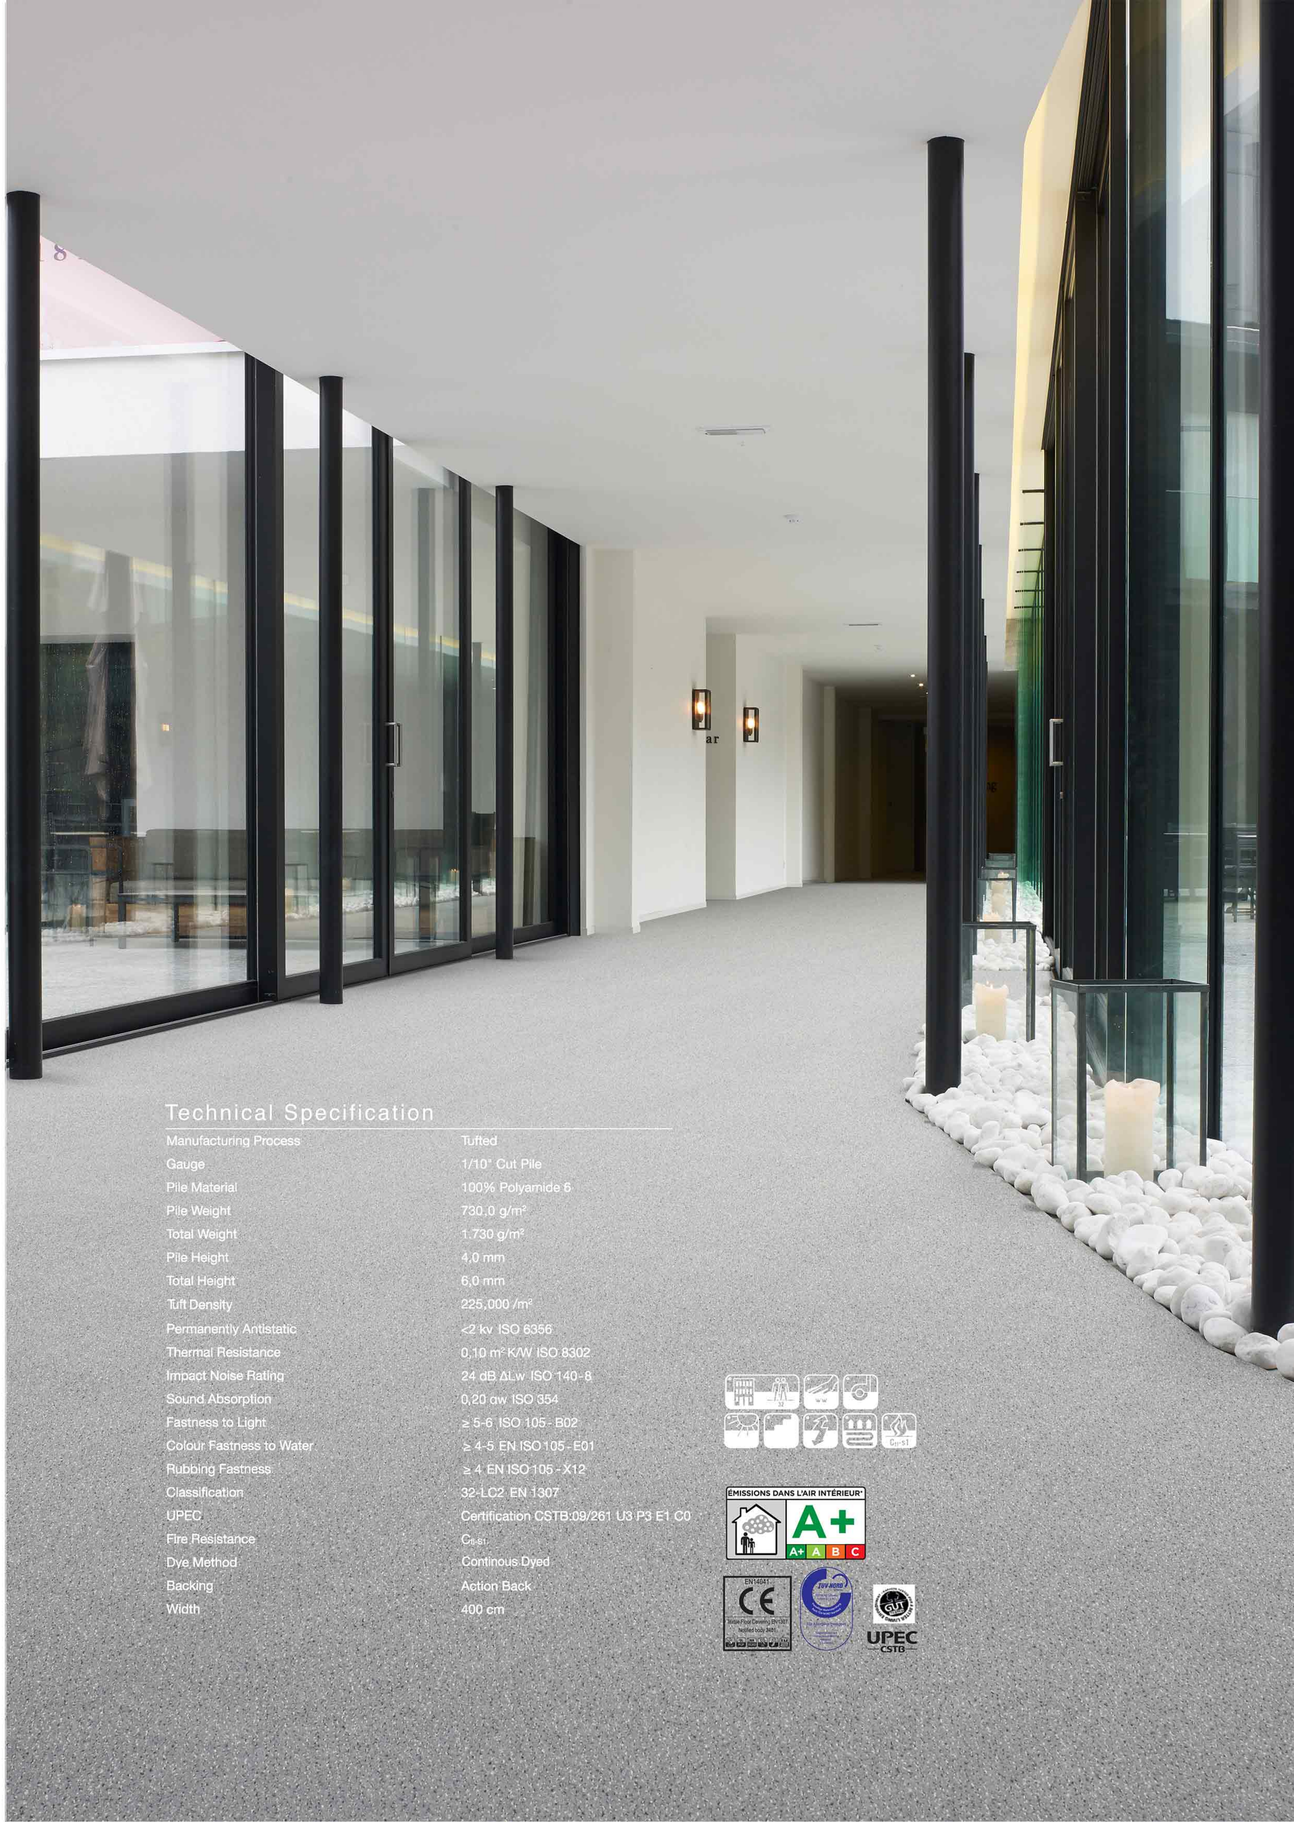

Technical Specification

Manufacturing Process	Tufted
Gauge	1/10" Cut Pile
Pile Material	100% Polyamide 6
Pile Weight	730,0 g/m²
Total Weight	1.730 g/m²
Pile Height	4,0 mm
Total Height	6,0 mm
Tuft Density	225,000 /m²
Permanently Antistatic	<2 kv ISO 6356
Thermal Resistance	0,10 m² K/W ISO 8302
Impact Noise Rating	24 dB ΔLw ISO 140-8
Sound Absorption	0,20 αw ISO 354
Fastness to Light	≥ 5-6 ISO 105 - B02
Colour Fastness to Water	≥ 4-5 EN ISO 105 - E01
Rubbing Fastness	≥ 4 EN ISO 105 - X12
Classification	32-LC2 EN 1307
UPEC	Certification CSTB:09/261 U3 P3 E1 C0
Fire Resistance	C_{fl}-s1
Dye Method	Continous Dyed
Backing	Action Back
Width	400 cm

Kompakt

130

180

220

480

370

640

850

895

930

980

Technical Specification

Gauge	1/10 " Loop Pile
Pile Material	%100 Polypropylene
Pile Weight	610 g/m²
Total Weight	1.782 g/m²
Pile Height	3,2 mm
Total Height	6,5 mm
Number of Tufts	186.120 /m²
Thermal Resistance	0,12 m²K/W
Sound Absorption	23 dB
Light Fastness	5-6
Water Resistance	4
Fire Behavior	$C_{fl\text{-}s1}$
Backing	Actionbac
Width	400 cm

Ondra

60

150

270

340

380

430

460

520

550

590

680

780

820

860

920

Technical Specification

Manufacturing process	Tufted
Gauge	1/10" Loop Pile-tonal
Pile material	100% Polyamide
Pile weight	530 g/m²
Total weight	2.000 g/m²
Pile height	3,0 mm
Total height	5,5 mm
Number of tufts	144.000 /m²
Flammability	ISO 13501-1 Cfl - S1
Sound absorption coefficient	ISO 354 2.000 Hz
Impact noise rating	ISO 140-8 21dB
Thermal insulation rating	ISO 8302 ≤0,17m² K/W
Boby voltage	ISO 6356 ≤2 kV
Earth discharge time	≤ 10^9 R_{EP} Ohm IEC 1340-4
Light fastness	EN ISO 105-B 02 ≥5
Water fastness	EN ISO 105-E 01 ≥4
Abrasion resistance	wet ≥3 EN ISO 105-X 12 dry≥4
Backing	Actionbac
Width	400 / 500 cm

Rondo

71

80

181

341

355

461

511

541

555

581

731

770

832

846

851

Technical Specification

Manufacturing process	Tufted		
Gauge	1/10" Loop pile		
Pile material	100% Polyamide		
Pile weight	440 gr/m²		
Total weight	1.750 gr/m²		
Pile height	2,5 mm		
Total height	5,0 mm		
Number of tufts	160.000 / m²		
Fire behavior	Cfl - S1	DIN EN	ISO 13501-1
Sound absorption coefficient	2.000 HZ	0,50	ISO 354
Impact noise rating	dB	21	ISO 140-8
Thermal insulation rating	m² K/W	≤ 0,17	ISO 8302
Body voltage	kV	≤ 2	ISO 6356
Light fastness	≥5	EN ISO	105 - B 02
Water fastness	≥4	EN ISO	105 - E 01
Abrasion resistance	wet ≥3 dry ≥4	EN ISO	105-X 12
Backing	Actinbac		
Width	400 / 500 cm		

Caprice

35

37


38

39

40

41

42

43

Technical Specification

Manufacturing Process	Tufted
Gauge	5/64" Cut Pile
Pile Material	100% Polyamide 6
Pile Weight	630,0 g/m²
Total Weight	1.576 g/m²
Pile Height	4,2 mm
Total Height	6,4 mm
Tuft Density	294,000 /m²
Permanently Antistatic	<2 kv ISO 6356
Thermal Resistance	0,09 m² K/W ISO 8302
Impact Noise Rating	22 dB ΔLw ISO 140-8
Sound Absorption	0,20 αw ISO 354
Fastness to Light	≥ 5-6 ISO 105-B02
Colour Fastness to Water	≥ 4-5 EN ISO 105-E01
Rubbing Fastness	≥ 4 EN ISO 105-X12
Classification	33-LC2 EN 1307
Fire Resistance	$B_{fl\text{-}S1}$
Dye Method	Printed
Backing	Action Back
Width	400 cm



نشان‌ها و استانداردها

لیبل سبز CRI یک موسسه جامع فرش و موکت است. در این موسسه آزمایش های مختلف زیست محیطی بر روی فرش و موکت انجام می شود. با عضویت در این موسسه می توان استانداردهای لازم زیست محیطی را بدست آورد.



این استاندارد نشان دهنده کیفیت هوای داخلی محیط است. شاخص های میزان ترکیبات آلی فرار در محصولاتی که تولید می‌شود، یکی از 4 گرید سلامت را دارا خواهد بود. که گرید A+ کمترین میزان انتشار ترکیبات مضر برای سلامت افراد در درون ساختمان را نشان می دهد.

PVC-Free

کفپوش‌هایی که پشتیبان های PVC دارند، همواره با خود ریسک بزرگی به نام تغییرات شیمیایی پلاستیکی به همراه دارند. این واکنش‌های شیمیایی بین PVC و مواد چسبنده باقی مانده از قبل بر روی کف رخ می‌دهد.

هدف GUT بهبود مداوم کلیه جنبه های حفاظت از محیط زیست و مصرف کننده در طول عمر یک پوشش کف از زمان تولید تا نصب ، چرخه عمر استفاده و حتی بازیافت آن است. صنعت فرش اروپا با ارتقاء مداوم اهداف و استانداردهای زیست محیطی، صنعت کف سازی را متحول کرده است.

این نشان، استاندارد جهانی NSF نام دارد. این استاندارد قوانین بسیار سختگیرانه‌ای برای محافظت از سلامت عمومی دارد. در این سازمان آزمایشات گسترده تجزیه و تحلیل مواد و همه جنبه های محصول مورد بررسی قرار میگیرد.

مدرک LEED-EB یک استاندارد امریکایی در حوضه انرژی و محیط زیست میباشد.
این استاندارد در حوضه ساختمان و آپارتمان‌ها مطرح می گردد. و هدف اصلی آن حداکثر بهره وری عملیاتی و در عین حال به حداقل رساندن تأثیرات زیست محیطی است.

این علامت مربوط استاندارد منسوجاتی از جمله فرش و موکت و کالاهای قابل استفاده در اتحادیه اروپا می‌باشد. تمامی اقلام قابل عرضه در اروپا ملزم به کسب نشان استاندارد آن محصول می‌باشند.

Cradle To Cradle یک استاندارد امریکایی است که نشان دهنده قابلیت بازیافت است. رنگ سبز حلقه آن مربوط به چرخه محصولات طبیعی و زیستی است و رنگ آبی مربوط به چرخه تکنولوژی می‌باشد.

این نشان یک استاندارد جهانی است که در مورد ساختمان سبز صحبت میکند. و هدف اصلی آن کمک به خلق بناهایی است که مواد تشکیل دهنده آن قابلیت بازیافت و استفاده مجدد داشته باشند، کیفیت هوای داخلی مورد توجه قرار گرفته و از مواد غیر سمی و پایدار در آن استفاده شده باشد.

این استاندارد توسط شرکت های CEN (کمیته استاندارد سازی اروپا)، CENELEC (کمیته استاندار سازی الکترونیکی اروپا) و ETSI (موسسه استاندارد ارتباطات اروپا) ارائه می گردد. تمامی مشخصات فنی ارائه شده توسط تولید کننده باید دارای این استاندارد باشند. این استاندارد مربوط به تمامی منسوجات می‌باشد.

این استاندارد ها مربوط به کیفیت و عملکرد یک کالا می‌باشند. بر این اساس هنگامی که یک سازمان الزامات یک سیستم مدیریت کیفیت را مشخص می کند؛ باید توانایی خود را در ارائه مداوم محصولات و خدماتی مطابق با رضابت مشتری و الزامات قانونی و مقرر نشان دهد. هدف از اعطای این استاندارد ها ارتقاء رضایت مشتری از طریق استفاده مؤثر از سیستم ، از جمله فرایندهای بهبود کیفیت و اطمینان از انطباق و الزامات قانونی و مقررات قابل اجرا است.

Sisal COMMERCIAL

WE SUPPLED OVER THAN 1000 PROJECTS

مجموعه سیزال مفتخر است که کلیه محصولات خود را با توجه به نیاز مصرف کنندگان و با رعایت استانداردهای روز جهانی اعم از کیفیت و سازگاری با محیط زیست ارائه می نماید. بر همین اساس تیمی از کارشناسان فنی را در سیزال گردهم آورده ایم و ماحصل کار خود را خلق یک اثر هنری میدانیم.

اکنون پس از ۱۴ سال فعالیت مستمر و پویا، نوین سیزال صنعت به عنوان یکی از بزرگترین شرکت های ارائه دهنده موکت های اداری، هتلی و مسکونی در ایران افتخار همکاری با معتبرترین نام های تجاری ، اداری و دولتی را در کارنامه خود دارد.

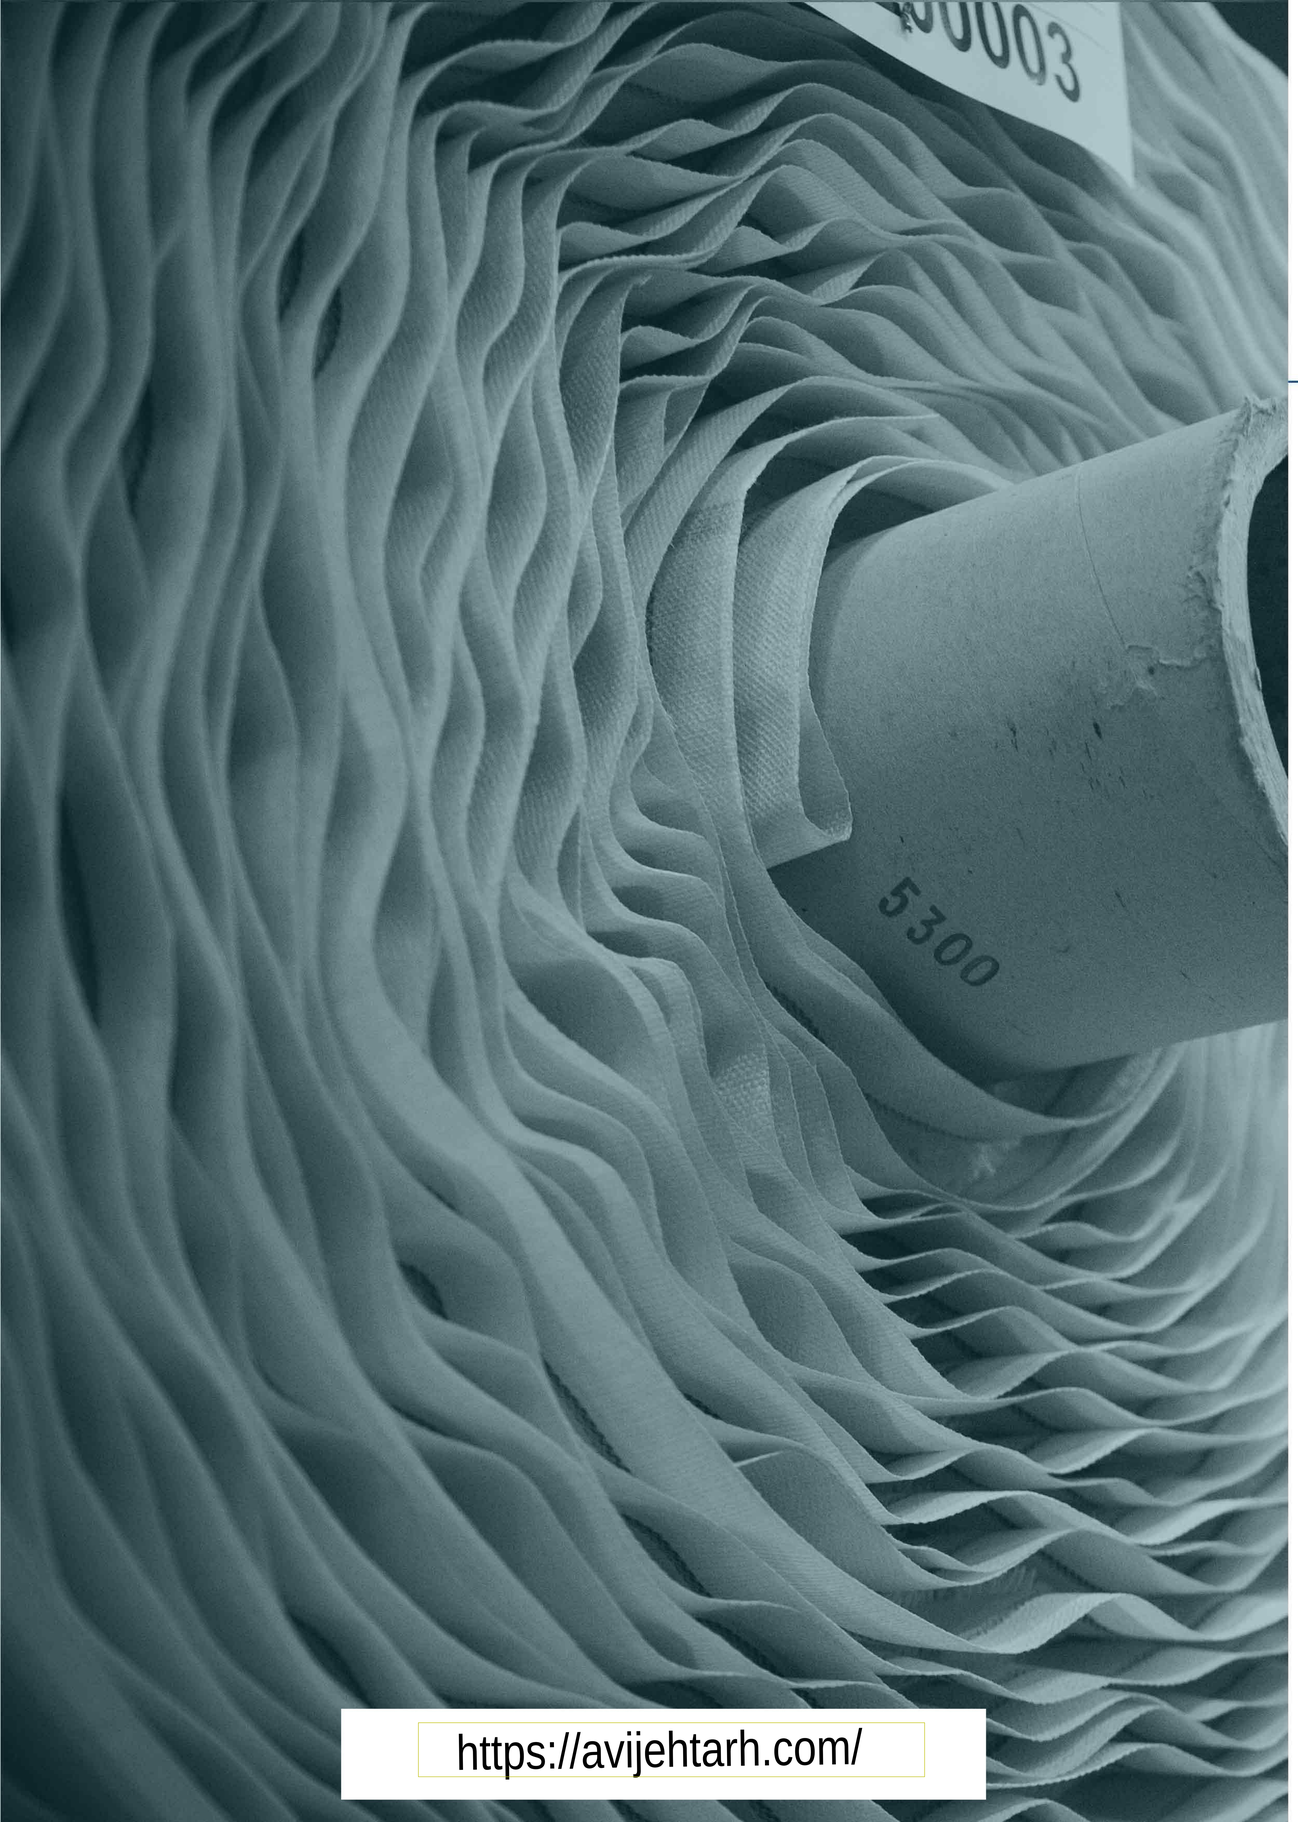

https://avijehtarh.com/

رزومه فعالیت

Sisal COMMERCIAL

شماره های تماس

گرجانی 09121542673

باقرین 09123156316

https://avijehtarh.com

Novin Sisal Sanat CO / Sisal Studio All Right Reserved / August 2019 Edition